GTX TITAN ACX Backplate Installation

Step 1

Remove 2 screws from the bracket.

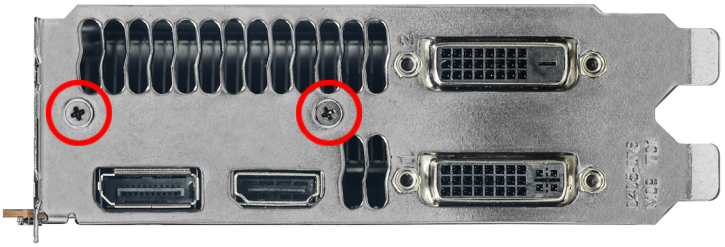

Step 2

Remove these 4 screws first. These are M2 screws.

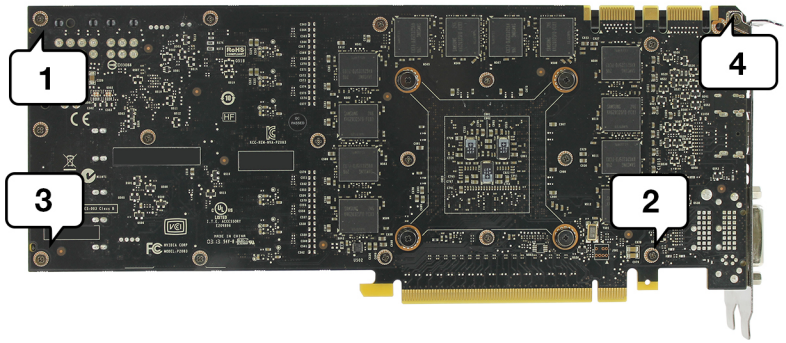

Step 3

Remove these 4 screws first. These are M2.5 screws.

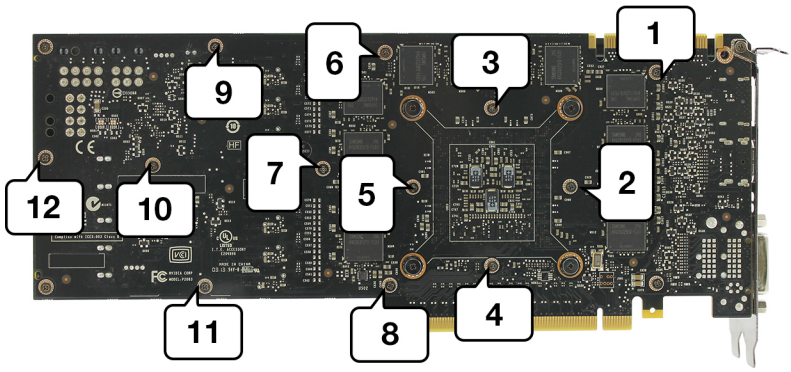

Step 4

Remove the 4 screws surrounding the GPU.

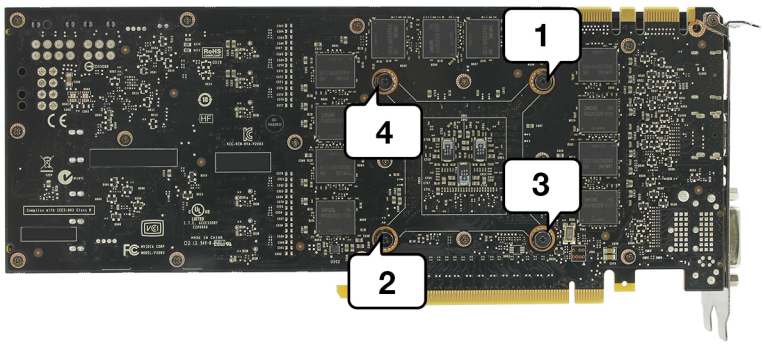

Step 5

Remove the TITAN cooler slowly.

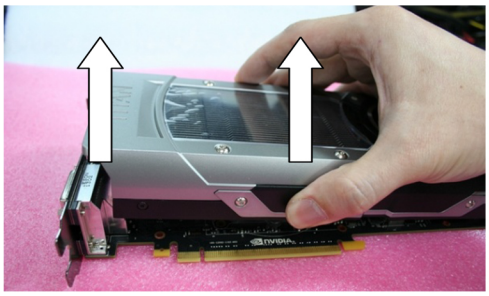

Step 6

Remove power cable (4pin) and LED cable (2pin) from pin header carefully.

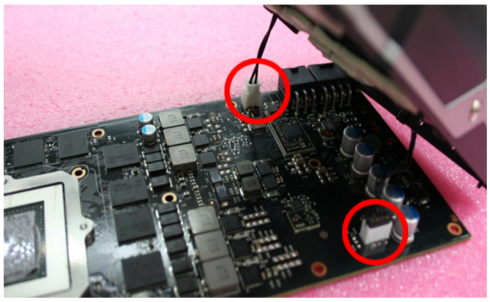

Step 7

Clean the remaining thermal grease on GPU.

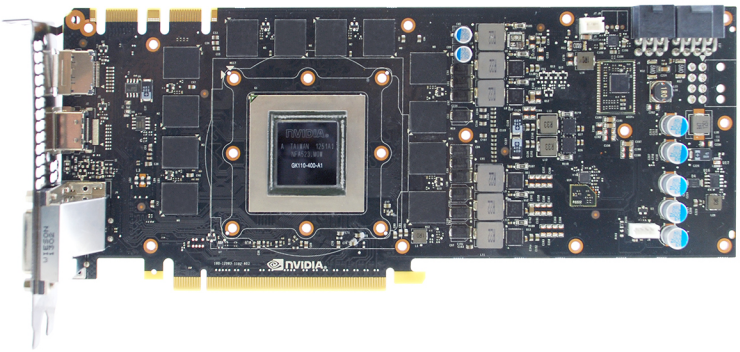

Step 8

Ensure all thermal pads on baseplate are intact and in place.

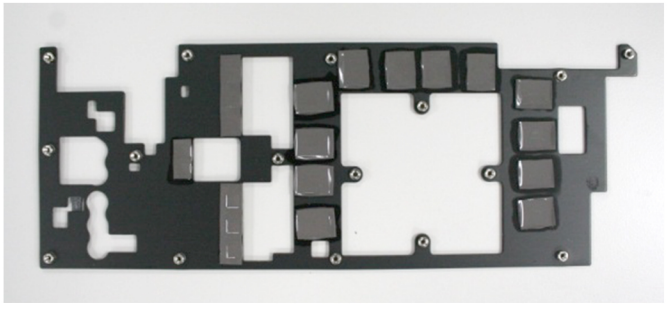

Step 9

Assemble the baseplate on PCB and apply thermal grease to the GPU.

Step 10

Install the M2 screws.

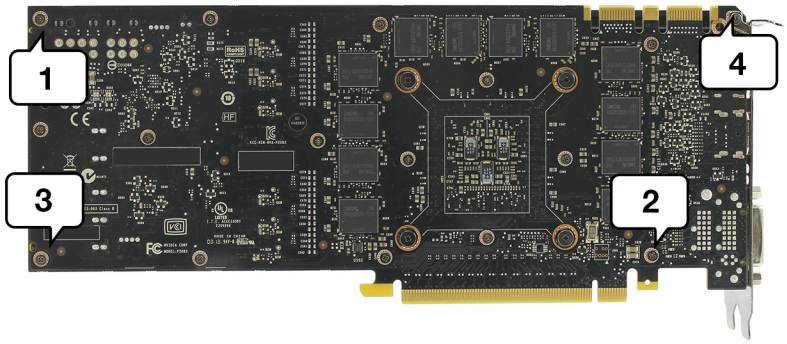

Step 11

Install the M2.5 screws.

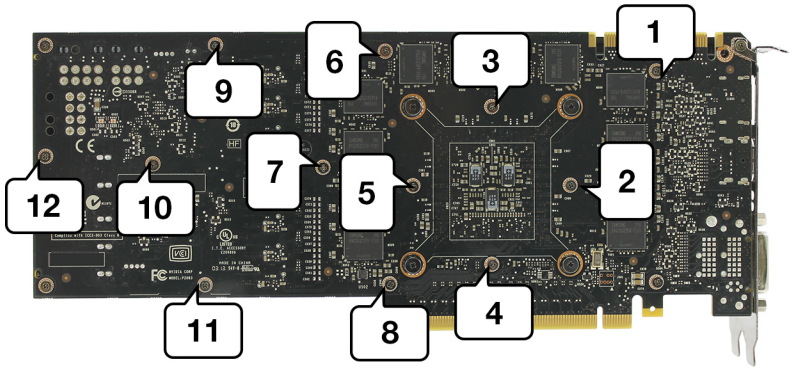

Step 12

Plug in the ACX cooler power to the 4pin header.

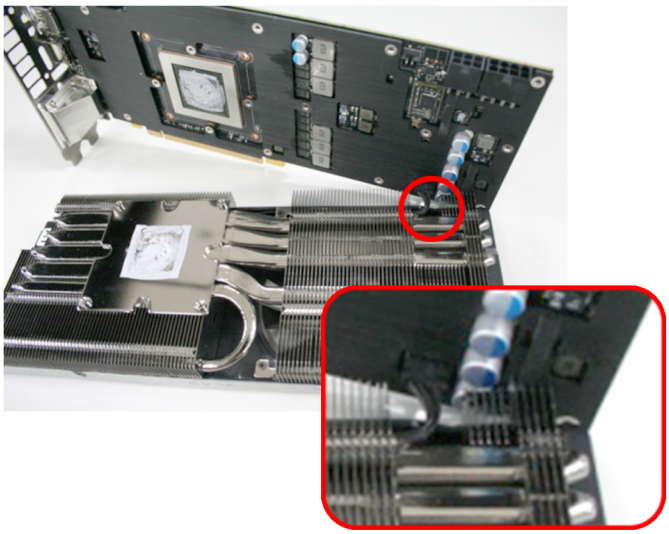

Step 13

Install the 4 screws surrounding the GPU. (NOTE: the 2 screws removed from bracket are no longer used)

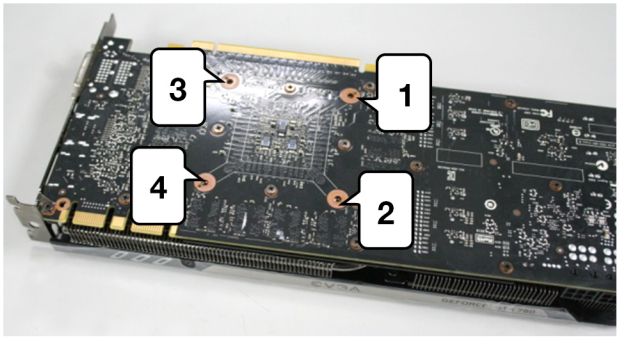

Step 14

Install card and game on!